

UNITED ALLOYS
RESEARCH & DEVELOPMENT INC.

125 BLACKSTONE AVE.

JAMESTOWN, NY
1-800-356-WELD

ANTI-SEIZE COPPER
HIGH TEMPERATURE RESISTANCE

DESCRIPTION

This high temperature, anti-seizing agent can also be used as a quality protective coating. Temperature range to 2,000oF.

FEATURES AND BENEFITS

Provides excellent adhesion, high E.P. capability, water repellent, compatible with other lubricants, non-melting, non-gumming and non-hardening. Also prevents galling, seizing and galvanizing action. It is a premium quality lubricant that also serves as a protective coating for service in highly corrosive environments.

APPLICATIONS AND USES


For use on nuts, bolts, studs, etc. Acts as a lubricant on bearings, slides.

DIRECTIONS FOR USE

Shake well before using. Make sure surface is cleaned of all dirt, grease, and grime. Spray liberal amount from distance of 8 to 10 inches. Invert can after use and spray short bursts to clear valve.

SIZE / AVAILABILITY

16-oz. Aerosol
Net Weight 14 oz.
12 per case

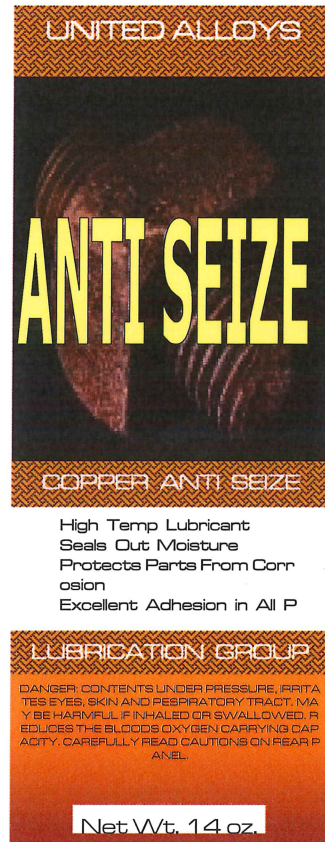

HIGH TEMP COPPER ANTI-SEIZE

HMIS	
HEALTH	2
FLAMMABILITY	4
REACTIVITY	0
PERSONAL PROTECTION	B

