

# UNITED ALLOYS

RESEARCH & DEVELOPMENT INC.

125 BLACKSTONE AVE.

JAMESTOWN, NY  
1-800-356-WELD

## LUBETECTIC

### TEFLON LUBRICANT

#### DESCRIPTION

This product is a transparent, high pressure lubricant with high adhesive strength. A unique combination of natural and synthetic lubrication agents coupled with a high molecular weight polymer (PTFE) makes this product one of the best available for extreme duty lubrication. .

#### FEATURES AND BENEFITS

Lasts longer than conventional lubricants. Withstands severe temperatures. Prevents sticking and freezing of rubber and metal. Works from -30oF to +600oF. Prevents rust and corrosion. Resists water washout. Applies as a thin penetrant and quickly sets to a clear tacky gel.

#### APPLICATIONS AND USES


Use on door hinges, open gears, wire ropes and cables, chains and sprockets, conveyors, and manifold heat valves.

#### SIZE / AVAILABILITY


20-oz. Aerosol  
Net Weight 13 oz.  
12 per case

#### DIRECTIONS FOR USE

VOC Weight: 72.41% Less Federally Exempt Solvents  
Shake well before using. Saturate area to be lubricated. If necessary, repeat

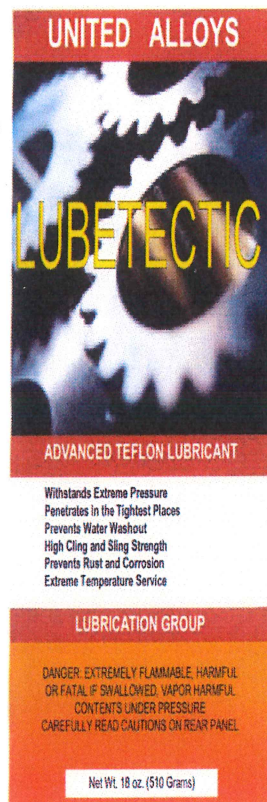

HMIS	
HEALTH	2
FLAMMABILITY	4
REACTIVITY	0
PERSONAL PROTECTION	B



EXTREME DUTY LUBETECTIC